

Broad-Band Gap Coupled Microstrip Antenna

E. K. ANANDAN, P. SUDHANAN, AND K. C. NAIR, MEMBER IEEE, IISc

Abstract—A rectangular patch with long horizontal is divided into a parallel structure. Coupling to the vertical edge is reduced. The impedance matching becomes a very simple task with a thin parallel structure coupled with frequency. As impedance bandwidth, it is seen that at a considerable part of the area also, it is obtained. The concept of coupled microstrip has been extended for structural incorporation of the horizontal part.

1. Introduction

RECENTLY, the use of microstrip antennas has become increasingly popular because of various inherent advantages such as light weight, simplicity of fabrication, ease of mass production, etc. The most handicap of microstrip antennas is their very narrow impedance bandwidth [1]. A number of papers have reported in technical literature on bandwidth enhancement of microstrip antenna using additional microstrip lines [2-4].

IEEE JOURNALS / TRANSACTIONS (USA)

the size of the structure becomes very large, making them unsuitable as array elements; 2) the radiation pattern is highly dependent on the frequency. That is, the pattern varies with frequency. A compact antenna configuration with enhanced impedance bandwidth and less distorted radiation pattern has been reported [5]. In this paper, the experimental and theoretical impedance characteristics of a patch antenna loaded with parallel channels is analyzed in detail. The theoretical model presented here agrees with the observations consistently.

The actual rectangular patch antenna is shown in Fig. 1. The feed point is at P and the antenna is excited in the U - V mode. In the proposed configuration, the same patch is divided into several parts. The central section along U and the remaining parts are kept as patches. Since the radiation frequency is also a function of width, the patches are made of unequal widths. So the different patches are operating at different frequencies and this multiple resonance is responsible for the increase in bandwidth.

2. Experimental Procedure and Results

A rectangular patch of 90 x 35 mm was formed on a substrate (Rohr RT Duroid) antenna ($\epsilon = 2.2$). This is fed along the radiating edge at a distance of 40 mm from the



Fig. 1. (a) Rectangular patch antenna. (b) Proposed configuration. A, B, C, D and E are patches.

radiating edge to obtain a 50- Ω match. The physical dimensions of the antenna are given in Table I. Numerical analysis is done which are related to the low impedance match.

The feed point is now shifted toward the radiating edge to improve the impedance match. When additional patches of widths 10, 5, and 15 mm were added to the system the feed point was shifted further toward the radiating edge. The resultant configuration is shown in Fig. 2(a). From Fig. 2(b) it can be seen that the measured SWR is less than two in the frequency range of 1121 to 1173 MHz which corresponds to a bandwidth of 5%. The physical width of the antenna (total width of strips and feed) is 35 mm. For a comparison, a patch of 90 x 35 mm was fabricated and its characteristics were studied. This antenna had a resonance frequency of 1121 MHz and a 3-dB SWR bandwidth of 0.6%. This proves that the newly designed antenna gives a bandwidth eight times that of a conventional patch antenna.

The radiation patterns of the antenna for these different configurations in the plane of interest are given in Fig. 3. The radiation pattern characteristics were measured in a typical antenna chamber. It can be seen that the radiation pattern is very similar.

3. Theoretical Analysis

The impedance characteristics of the rectangular patch antenna proposed can be analyzed by extending the theory of coupled microstrip [6, 7]. In this paper, the impedance matching is achieved with a single parallel channel.

Manuscript received April 26, 1990; revised October 21, 1990. This work was with the Department of Electronics, Coimbatore Institute of Technology, Coimbatore 642 011, India. E. K. Anandan is now with IISc, Bangalore 560 075.

Broad-Band Gap Coupled Microstrip Antenna

C. K. AANANDAN, P. MOHANAN, AND K. G. NAIR, SENIOR MEMBER, IEEE

Abstract—A microstrip antenna with large bandwidth is developed using a parasitic technique. Compared to the available wide-band antennas, the proposed antenna structure is very compact and gives a less distorted radiation pattern with frequency. An impedance bandwidth, eight times that of a conventional patch antenna of the same size, is achieved. The concept of coupled microstrip line model is extended for theoretical interpretation of the impedance loci.

I. INTRODUCTION

RECENTLY, the use of microstrip antennas has become increasingly popular because of various inherent advantages such as light weight, simplicity of fabrication, ease of mass production, etc. The main handicap of microstrip antennas is their very narrow impedance bandwidth [1]. A number of papers have appeared in technical literature on bandwidth enhancement of microstrip antennas using additional resonators coupled to the driven element [2]–[4]. However, these antennas create two main problems for the designer: 1) when the parasitic elements are coupled to the patch antenna the size of the structure becomes very large, making them unsuitable as array elements; 2) the radiation pattern is highly dependent on the frequency. That is, the pattern maxima squint with frequency. A compact antenna configuration with enhanced impedance bandwidth and less distorted radiation pattern has been reported [5]. In this paper, the experimental and theoretical impedance characteristic of a patch antenna loaded with parasitic elements is analyzed in detail. The theoretical model presented here agrees with the observation excellently.

The normal rectangular patch antenna is shown in Fig. 1. The feed point is at P and the antenna is excited in the $(1, 0)$ mode. In the proposed configuration, the same patch is divided into several parts. The central section alone is fed and the remaining parts are kept as parasitics. Since the resonant frequency is also a function of width, the sections are made of unequal widths. So the different patches are resonating at different frequencies and this multiple resonance is responsible for the increase in bandwidth.

II. EXPERIMENTAL PROCEDURE AND RESULTS

A rectangular patch of 90×10 mm was formed on a 0.8-mm thick RT Duroid substrate ($\epsilon = 2.2$). This is fed along the nonradiating edge at a distance of 40 mm from the

Manuscript received April 26, 1989; revised October 31, 1989.

The authors are with the Department of Electronics, Cochin University of Science and Technology, Cochin-682-022, India.
IEEE Log Number 9037633.




Fig. 1. (a) Rectangular patch antenna. (b) Proposed configuration. A is the driven element; B , C , D and E are parasitics.

radiating edge to obtain a $50\text{-}\Omega$ match. The measured resonant frequency using HP-8754A Network analyzer is 1151 MHz. When another patch of 90×10 mm was gap coupled to the nonradiating edge, the system gives two resonances which are shifted to the low impedance side of the Smith chart. The feed point is now shifted toward the radiating edge to increase the impedance.

When additional patches of widths 10, 5, and 15 mm were added to the system the feed point was shifted further toward the radiating edge. The resultant configuration is shown in Fig. 2(a). From Fig. 2(b) it can be seen that the antenna has a VSWR less than two in the frequency range of 1123 to 1175 MHz which corresponds to a bandwidth of 5%.

The overall width of the antenna (total width of strips and gaps) is 85 mm. For a comparison, a patch of 90×85 mm was fabricated and its characteristics were studied. This antenna has a resonance frequency of 1132 MHz and a 2:1 VSWR bandwidth of 0.6%. This proves that the newly designed antenna gives a bandwidth eight times that of a corresponding planar antenna.

The radiation patterns of the antenna at three different frequencies in the band of interest are given in Fig. 3. The radiation pattern measurement was conducted in a tapered anechoic chamber. It can be seen that the tilt from on-axis is very small.

III. THEORETICAL ANALYSIS

The impedance characteristics of the rectangular patch antenna coupled with parasitics is analyzed by extending the theory of coupled microstrip lines [6], [7]. In this paper, the theoretical results for a patch coupled with a single parasitic element is presented.

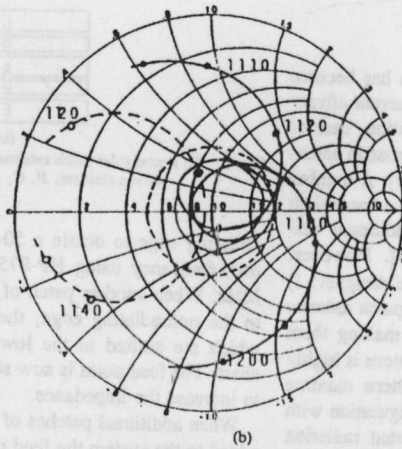
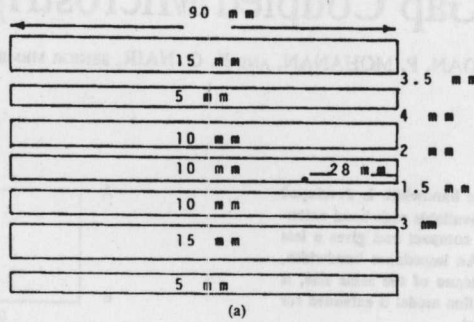


Fig. 2. (a) Parasitic coupled patch antenna. (b) Impedance loci. Solid line—parasitic antenna; Dotted line—rectangular patch antenna (90 × 85 mm).

A rectangular patch excited in the (1, 0) mode and coupled with a parasitic element along the nonradiating edge is shown in Fig. 4 (a). The distribution of capacitance of the microstrip line geometry is shown in Fig. 4 (b) and (c).

The even-mode capacitance can be divided into three as

$$C_{\text{even}} = C_p + C_f + C'_f \tag{1}$$

where $C_p = \epsilon_0 \epsilon_r (w/h)$ is the parallel plate capacitance between the strip and the ground plane.

The fringe capacitance

$$C_f = \frac{1}{2} [\sqrt{\epsilon_{\text{eff}}} c Z_c - C_p] \tag{2}$$

where Z_c is the characteristic impedance of the line and ϵ_{eff} is the effective dielectric constant of the substrate.

The modification of the fringe capacitance of a single line due to the presence of another line is given by

$$C'_f = C_f [1 + A(h/s) \tanh(10s/h)]^{-1} (\epsilon_r / \epsilon_{\text{eff}})^{1/2} \tag{3}$$

This capacitance is now modified as

$$C'_f = C_f [s(1 + A(h/s) \tanh(10s/h))]^{-1} (\epsilon_r / \epsilon_{\text{eff}})^{1/2} \tag{4}$$

where

$$A = \exp(-0.1 \exp(2.33 - 2.53w/h)) \tag{5}$$

The modified C_f will decrease the ϵ^e , the effective dielectric constant for the even mode and predicts the lower resonant frequency accurately.

The odd-mode capacitance:

$$C_o = C_p + C_f + C_{gd} + C_{ga} \tag{6}$$

The gap capacitance:

$$C_{ga} = \frac{1}{2} K(k') \epsilon_0 / [K(k)] \tag{7}$$

where

$$k = s/h [s/h + 2w/h]^{-1} \text{ and } k' = 1 - k^2 \tag{8}$$

and $K(k)$ and $K(k')$ are elliptic functions.

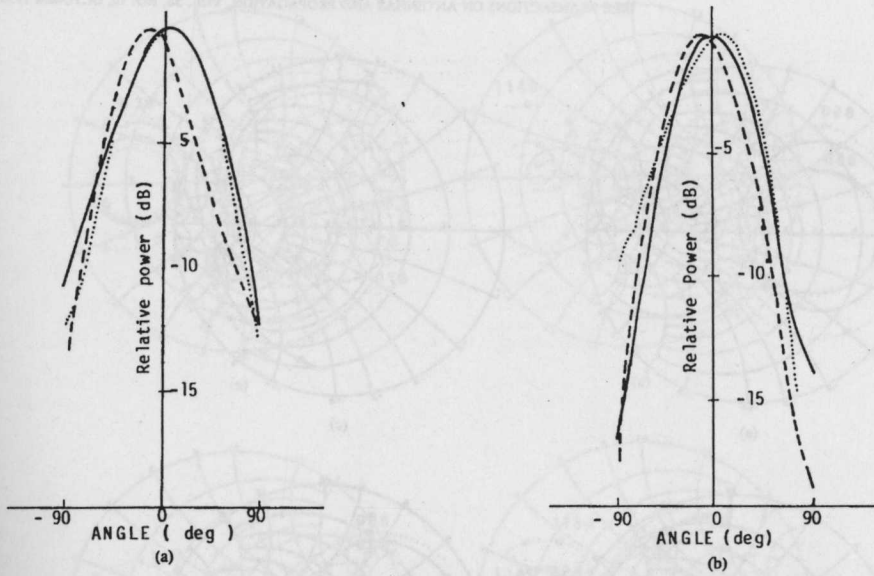


Fig. 3. Radiation patterns of the antenna configuration shown in Fig. 2(a). (a) *H*-plane, (b) *E*-plane. Solid line—1130 MHz; dashed line—1145 MHz; dotted line—1165 MHz.

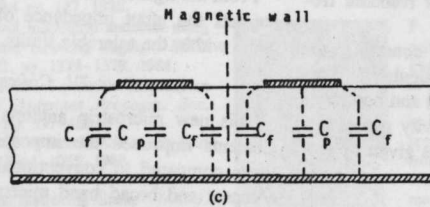
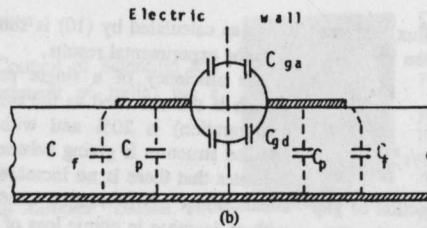
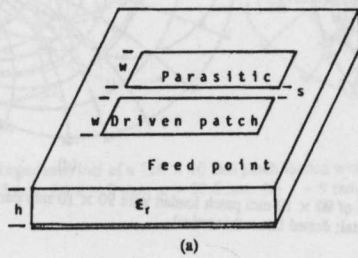


Fig. 4. (a) Geometry of the rectangular patch antenna coupled with parasitic element. (b) Even mode. (c) Odd mode capacitance of the coupled microstrip line geometry.

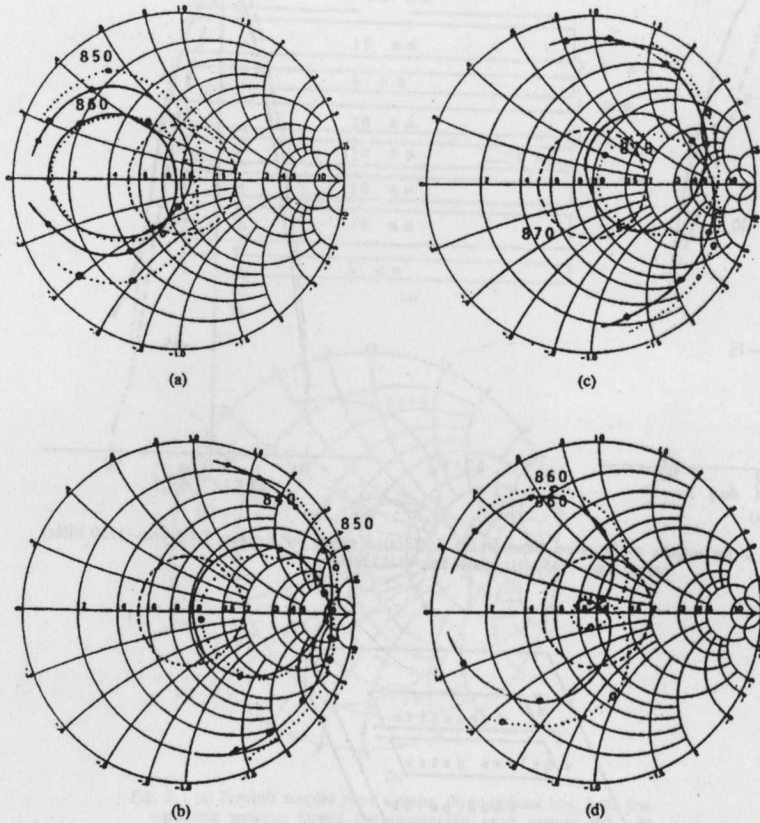


Fig. 5. Experimental and theoretical impedance loci of 90×10 mm patch loaded with 90×10 mm parasitic. Solid line—experimental; dotted line—theoretical.

The capacitance formed due to the electric flux between the air dielectric region between the strips is given by

$$C_{gd} = \epsilon_0 \epsilon_r / \pi \ln [\coth (\pi s / 4h)] + 0.65 C_f [0.02 / (s/h) \sqrt{\epsilon_r} + 1 - (1/\epsilon_r^2)]. \quad (9)$$

In this the constant 0.65 is replaced by a function of gap width as $(0.6 - s/2)$ which modified ϵ^0 the odd-mode effective dielectric constant and predicts the lower resonant frequency accurately.

Using the even- and odd-mode dielectric constants, the upper and lower resonant frequencies are calculated. Now the input impedances for the even mode $Z_{in}(e)$ and odd mode $Z_{in}(o)$ are calculated separately using the cavity model [1]. The resultant input impedance of the system is given by

$$Z_{in} = Z_{in}(e) + Z_{in}(o). \quad (10)$$

The input impedance of a parasitic loaded microstrip an-

tenna as calculated by (10) is shown in Figs. 5 and 6 along with the experimental results.

The efficiency of a single patch of size 90×10 mm (which is the one used as the driven element in the present configuration) is 20% and with respect to this, the gap coupled structure is giving enhanced efficiency of 55%. This indicates that there is no increase in ohmic loss. Hence, the enhancement of impedance bandwidth is not accompanied with an increase in ohmic loss of the system.

From the figures it is evident that the theory presented here predicts the input impedance of the present microstrip antenna within the tolerable limits.

IV. CONCLUSION

This new microstrip antenna gap coupled with parasitic elements improved the impedance bandwidth nearly eight times compared to conventional single patch antenna. This compact and broad band microstrip antenna can be conveniently used as an array element in phased array radars and monopulse antennas where large bandwidth is required.

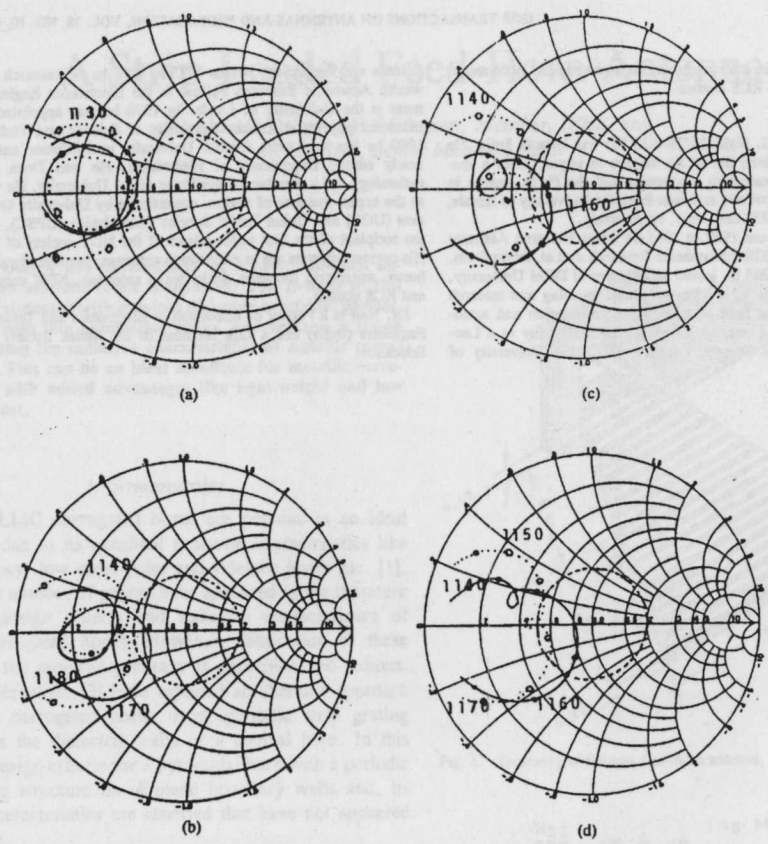


Fig. 6. Experimental and theoretical impedance loci of a 120×10 mm patch loaded with 120×10 mm parasite. (a) $s = 1$ mm, $z = 50.5$ mm. (b) $s = 1$ mm, $z = 23$ mm. (c) $s = 2$ mm, $z = 32.5$ mm. (d) $s = 9$ mm, $z = 50$ mm. Solid line—experimental; dotted line—theoretical.

ACKNOWLEDGMENT

P. Mohanan acknowledges the Council of Scientific and Industrial Research (CSIR), Government of India, for a Research Associateship.

REFERENCES

- [1] I. J. Bahl and P. Bhartia, *Microstrip Antennas*. Dedham, MA: Artech House, 1981.
- [2] C. Wood, "Improved bandwidth of Microstrip antennas using parasitic elements," *Proc. Inst. Elec. Eng. MOA* pp. 127, 1980.
- [3] G. Kumar and K. C. Gupta, "Broadband microstrip antennas using additional resonators gap coupled to the radiating edges," *IEEE Trans. Antennas Propagat.*, vol. AP-32, pp. 1375-1379, 1984.
- [4] J. R. Mosig and F. E. Gardiol, "The effect of parasitic elements on microstrip antennas," in *Proc. IEEE Antennas Propagat. Soc. Symp.*, Vancouver, Canada, June 1985, pp. 397-400.
- [5] C. K. Anandan and K. G. Nair, "Compact broad band micro strip antenna," *Electron. Lett.*, vol. 22, pp. 1064-1065, 1986.
- [6] C. Wood, private communication, 1987.
- [7] R. Garg, "Design equations for coupled microstrip lines," *Int. J. Electron.*, vol. 47, pp. 587-591, 1979.



C. K. Anandan was born in India in 1959. He received the M.Sc. and Ph.D. degrees from Cochin University of Science and Technology in 1981 and 1987, respectively.

Since 1987 he has been working as a Lecturer in Physics at the Government Brennen College, Tellicherry. He has engaged in research work in microstrip antennas, horn antennas and RCS studies. A part of his contribution on microstrip antennas has been included in the book *Microstrip Antenna Design*, edited by Benalla and Gupta (Artech House).



P. Mohanan was born in India in 1956. He received the Ph.D. degree in Microwave Antennas from Cochin University of Science and Technology in 1985.

From 1980 until 1986, he worked as a Lecturer in physics at St. Alberts College, Ernakulam. He spent two years as Dy. Engineer in Bharat Electronics, Ghaziabad, India. Since 1989 he has been working as a Research Associate of CSIR, Government of India, in the Department of Electronics, Cochin University of Science and Technology. His

research activities have been in microstrip antennas, corrugated horn antennas, leaky-wave antennas and RCS studies.



K. G. Nair (M'76-SM'80) was born in India. He received the M.Sc. degree in physics with a specialization in electronics and the Ph.D. degree in microwave antennas from the University of Kerala, in 1958 and 1966, respectively.

From 1962 to 1965 he was a Research Assistant in CSIR Ionospheric Research unit at Trivandrum. In 1965 he joined as Lecturer at Delhi University, where he did Post-graduate teaching and research in the field of microwave propagation and antennas. Later, he joined Kerala University as a Lecturer in physics. In 1972 he became Lecturer at Cochin University of

Science and Technology. From 1975 to 1976 he did research as a Commonwealth Academic Research Fellow in the Electronics Engineering Department at the University of Leeds. In 1976 he was appointed as Reader in industrial physics at Cochin University of Science and Technology. Since 1980 he has been with Cochin University as Professor and Head of the newly started Department of Electronics. He was Dean of Faculty of technology and a member of Syndicate of the University. He was nominated as the expert member of various committees by University Grants Commission (UGC) and Union Public Service Commission (UPSC), India. He was the recipient of the best paper award of the NDT society of India in 1989. His current interests are in microwave antennas; particularly electromagnetic horns, microstrip antennas, leaky-wave antennas, NDT using microwaves and RCS studies.

Dr. Nair is a Fellow of Institution of Electronics and Telecommunication Engineers (India) and a Life Member of the Indian Society for Technical Education.